

COSWICK

SUPERB STABILITY
DESIGN SOLUTIONS
ECO-FRIENDLY

Construction

Superb Stability

BALANCED SYMMETRICAL CONSTRUCTION

Base and middle core of Coswick 3-layer flooring is made of Birch. Birch hardness is close to that of top layer made of Oak, Ash or American Walnut. Base layer thickness is extended to 3 mm providing perfect symmetry and balance and eliminating any chance of cupping and warping in case of temperature or humidity fluctuations.

CORK COMPENSATOR

Cork compensators are inserted into the middle core every 15 cm. In the event of moisture effect - cork compensators reduce stress in the middle core and improve stability and structural integrity of the hardwood flooring plank.

LONGLASTING PU HOT MELT BONDING GLUE

Innovative polyurethane hot-melt adhesive is used by Coswick to bond all 3-layers of engineered flooring planks. Extra strong, water-resistant and highly elastic – the glue excludes delamination of flooring planks even in the event of flooding! Polyurethane bonding does not age, so, the glue joint performance lasts during all the flooring life time. 100% Eco-Friendly – the glue does not contain added formaldehyde or any other hazardous substances at all.

HIGH PERFOMANCE CosLoc 5G

Innovative Valinge 5G click locking system CosLoc is used to create Coswick 3-layer floating floors. Middle core made of Birch and the use of Cork Compensators leaving no gaps ensure no splits and chips on the click surface providing very tight and reliable connection even in case of floating installation, as well as eliminating unwanted plank movement and squeaking during exploitation. Coswick 3-layer all hardwood construction is hard enough to withstand any deformation of the click during installation and further exploitation.



Design Solutions

OVER 120 UNIQUE COLORS IN 5 PROTECTIVE FINISHES

EXTENDED MOSAIC LINE: CHEVRON, HERRINGBONE, MOSAIC TILES AND PARQUETRY FLOORING

PERFECT SOLUTIONS FOR HIGH-END PUBLIC SPACES IN ANY CLIMATE ZONE



All Coswick products are manufactured from natural wood, as well as only carefully selected high quality materials with strict requirements for ecological safety are used in company production process.

Finished Coswick products are regularly tested for formaldehyde content. According to European standard EN14342 formaldehyde emission of Coswick flooring corresponds to the safest class E1. What is more, the whole range of Coswick products either has No Added Urea Formaldehyde at all (NAUF) or meets ULEF requirements, as per American CARB ASTM standard. It means that the level of emissions of Volatile Substances of Coswick flooring is equal to that of natural wood.

DECLARATION ECO

t Coswick we strongly believe that Ecological Safety of hardwood flooring is just

Coswick hardwood floors are regularly tested for VOC emissions to ensure full compliance with highest environmental and ecological standards EN14342 (Class E1) and CARR ASTM (NAUF THEF)

FSC® (FSC C117884) certification is applied to all Coswick product lines, so, all the wood products manufactured by Coswick originate from raw timber harvested by forestries committed to environmentally and socially responsible logging. Ask for FSC-certified products

Coswick Team work closely with local organizations, institutions and forestries with the aim to protect and maintain environment and forest reserves. We are proud to say that all timber used for flooring production is harvested using clean felling procedures and environmentally responsible practices that do not lead to reduction in oak and ash wood.

Operating a fully integrated manufacturing cycle - 100% of manufacturing waste sawdust or wood chips) is recycled, burned in boilers for heating kiln dryers or tressed into wood briquettes widely used as fuel for home heating.


Completely Integrated Factory **COSWICK IS A CANADIAN OWNED FLOORING COMPANY** Coswick is a Canadian owned flooring manufacturer with production facilities located in Zaslavl, Belarus. Our manufacturing process is completely integrated starting with raw timber processing all the way to the end product. Coswick product lines include factory-prefinished ready-to-install hardwood flooring, wall panels, sports floors, decking & siding, as well as accessories. Company unique production process allows our Team to control quality at every stage of manufacture. Sawmills, Kiln dryers and UV finishing lines – all the machinery used by Coswick is state-of-the-art; operation - top talent available in the industry altogether ensures the highest and utmost product quality. 1,000,000 sq. m. Coswick Team numbers 600 people. Company's manufacturing capacity is over 1,000,000 sq. m. per year and about 90% of all the products are exported globally. Coswick dealer network spans over 45 countries, including Canada, USA, European Union, the Persian Gulf region, Russia, China, Australia etc. **COSWICK PRODUCTION PROGRAM** Coswick manufacturing program includes highly stable 3-layer single strip T&G and click flooring, solid hardwood floors, as well as chevron, herringbone, uniblock, parquetry and mosaic flooring. Product selection also includes sports floors, decorative wall & ceiling panels, acoustic panelling systems, decking & siding, as well as a complete line of care & maintenance products, coatings for on-site finishing and adhesives for flooring installation.



Coswick Hardwood Floors:

PLANK FLOORING

PLANK PLOOKING
Classic Collection
Brushed & Oiled Collection
Country Collection
Signature Collection
Heritage Collection
Arts & Crafts Collection
Wide Plank Floring
MOSAIC FLOORING
Chevron Collection
Chevron Collection CosLoc
Herringbone Collection
Mosaic Flooring
Parquetry Flooring
Uniblock Flooring Collection
SPORTS FLOORING
Tournament Pro Sport
Tournament Sport
Matrix Sport
Fitness Board
Portable Mosaic Dance
WOOD WALL PANELS
Acoustic Wall Panels
Decorative Wall Panels
TECHNICAL INFORMATION
Technologies
Finishing Systems
Grades
Technical Information
Moldings
Floor Care Products

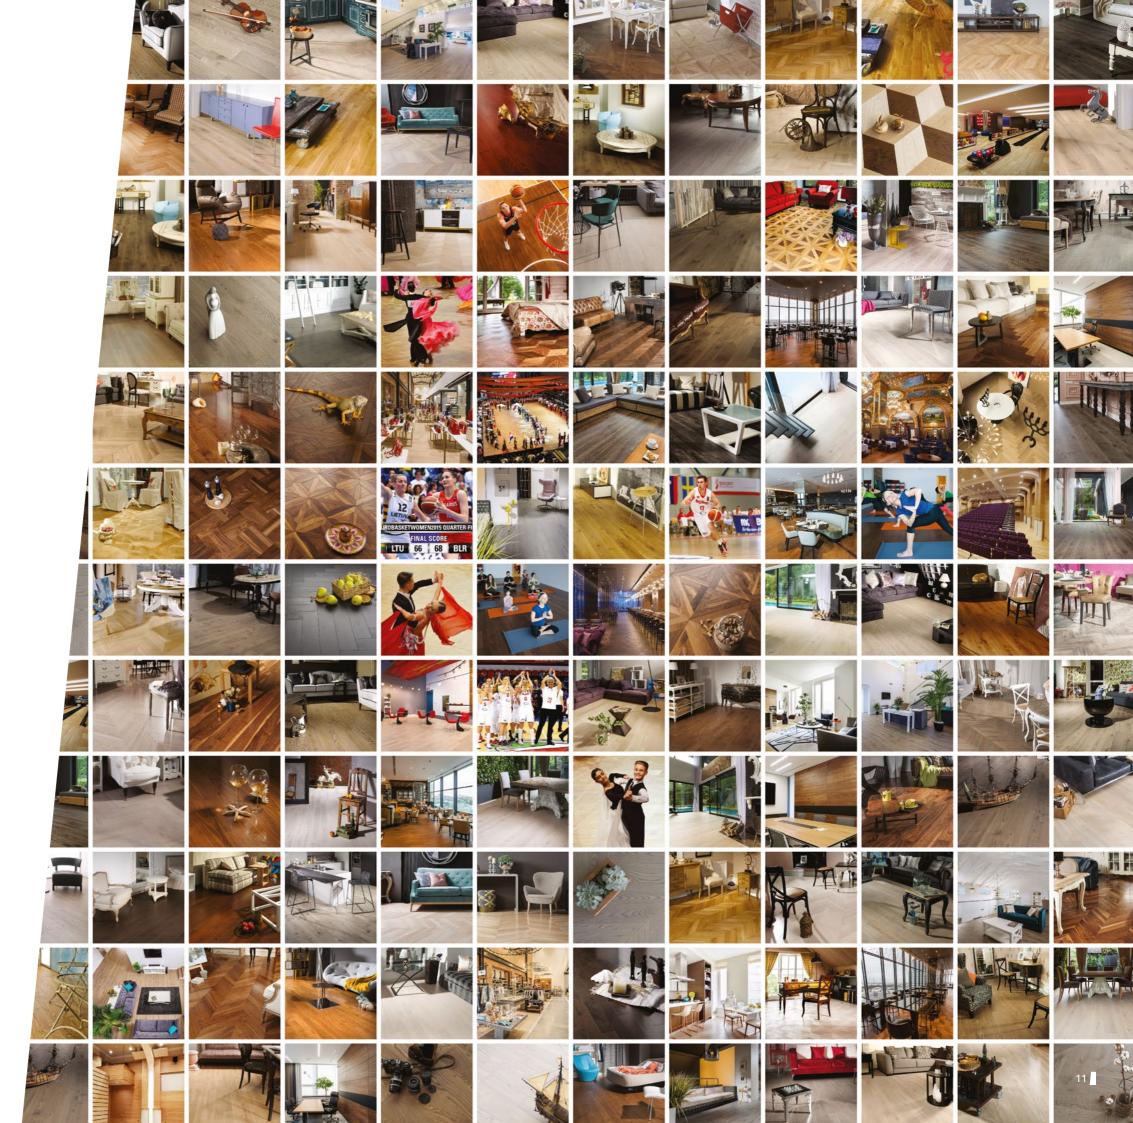



Classic Collection

Brushed & Oiled Collection

Country Collection

Signature Collection

Heritage Collection

Arts & Crafts Collection

Wide Plank Floring







- Lacquer
- Silk Oil
- Silk Oil ultra matte

GRADE:


S&B Select & Better

1N 1 Natur

Trad Traditional

CONSTRUCTION:

3-layer T&G engineered flooring











Silk Oil ultra matte

GRADE:

S&B Select & Better

1N 1 Common


Tav Tavern

CONSTRUCTION:

3-layer T&G engineered flooring





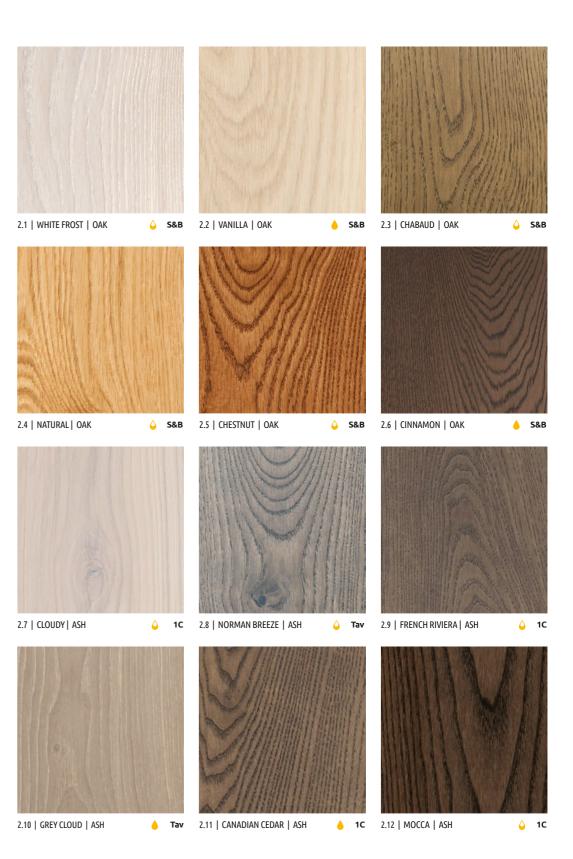





Silk Oil

Silk Oil ultra matte

GRADE:

1C 1 Common


Tav Tavern


1N 1 Natur


Char Character

CONSTRUCTION:

3-layer T&G engineered flooring





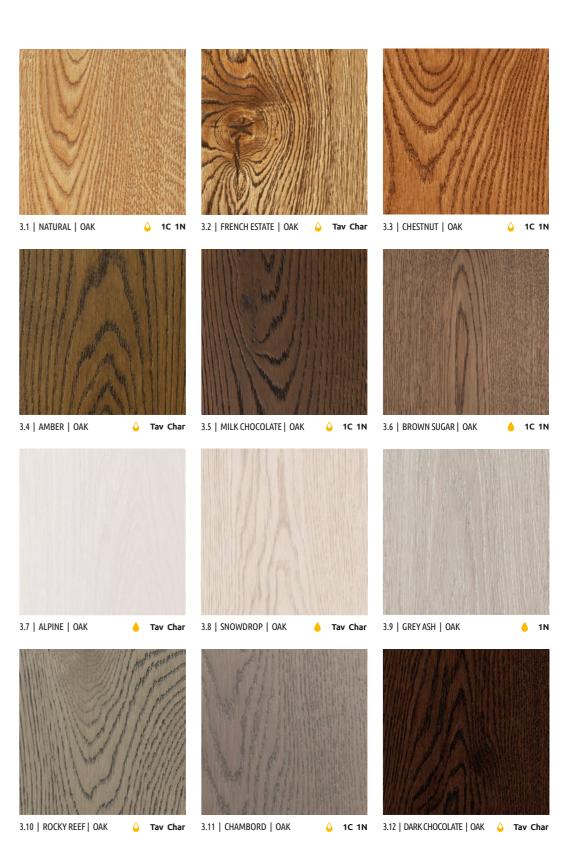







Lacquer matte

GRADE:


S&B Select & Better

CONSTRUCTION:

3-layer T&G engineered flooring





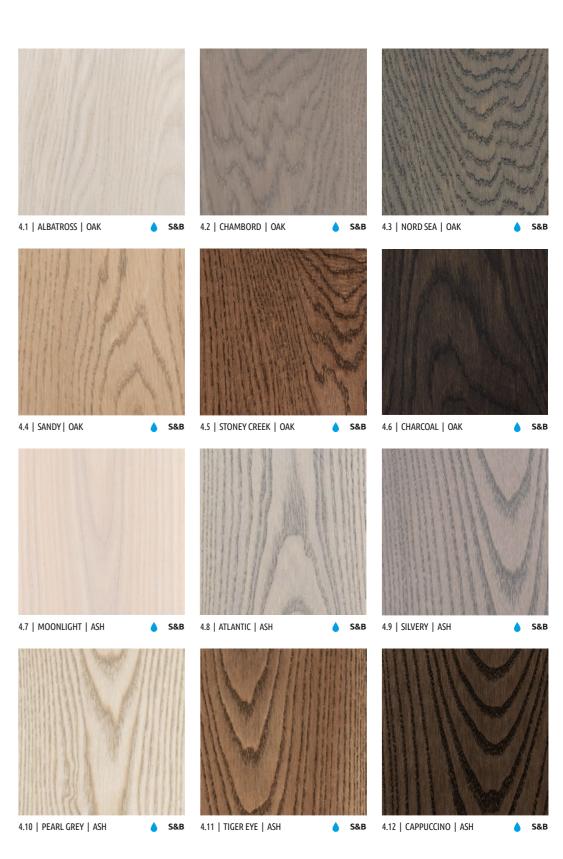





Silk Oil

Silk Oil ultra matte


GRADE:

1C 1 Common


Char Character

CONSTRUCTION:

3-layer T&G engineered flooring





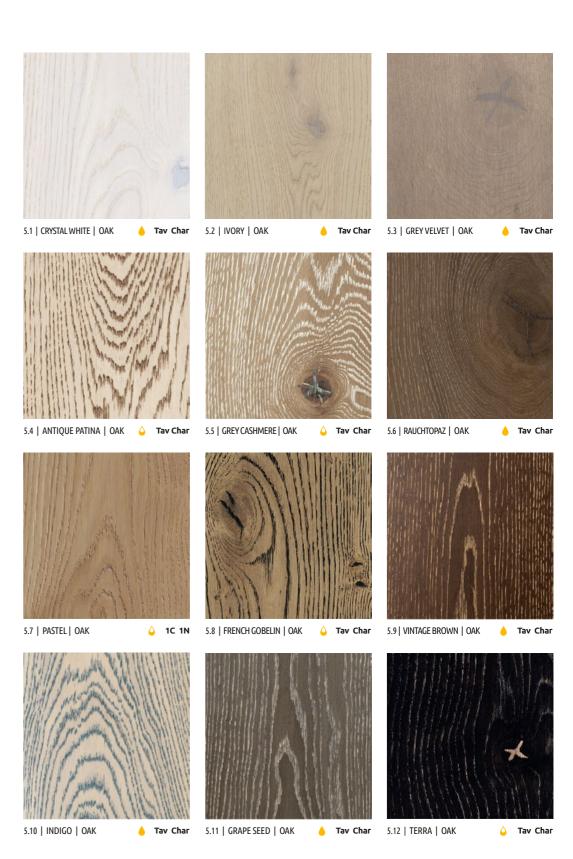





Silk Oil ultra matte

GRADE:


Char Character

CONSTRUCTION:

3-layer T&G engineered flooring





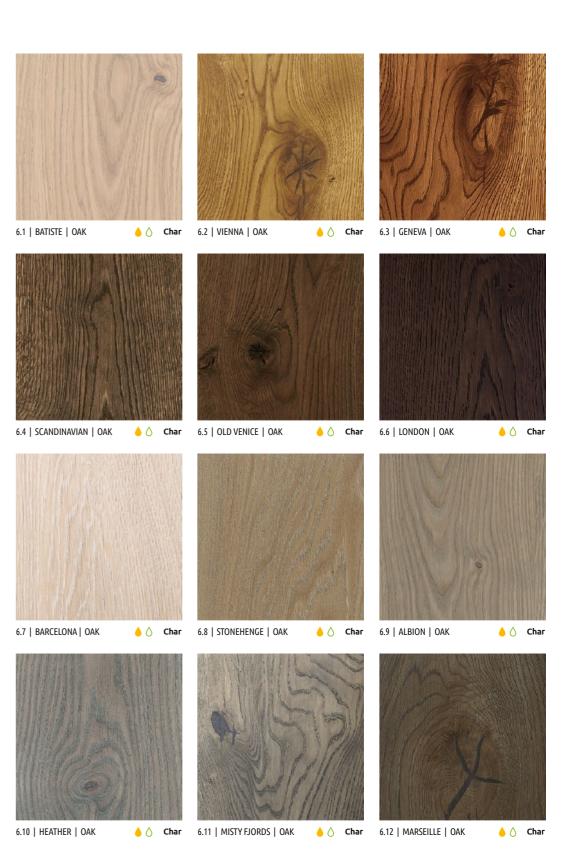






- Resilient Lacquer
- Silk Oil ultra matte


GRADE:

Char Character

CONSTRUCTION:

3-layer T&G engineered flooring
























Chevron Collection


Chevron Collection CosLoc

Herringbone Collection

Mosaic Flooring

Parquetry Flooring

Uniblock Flooring Collection

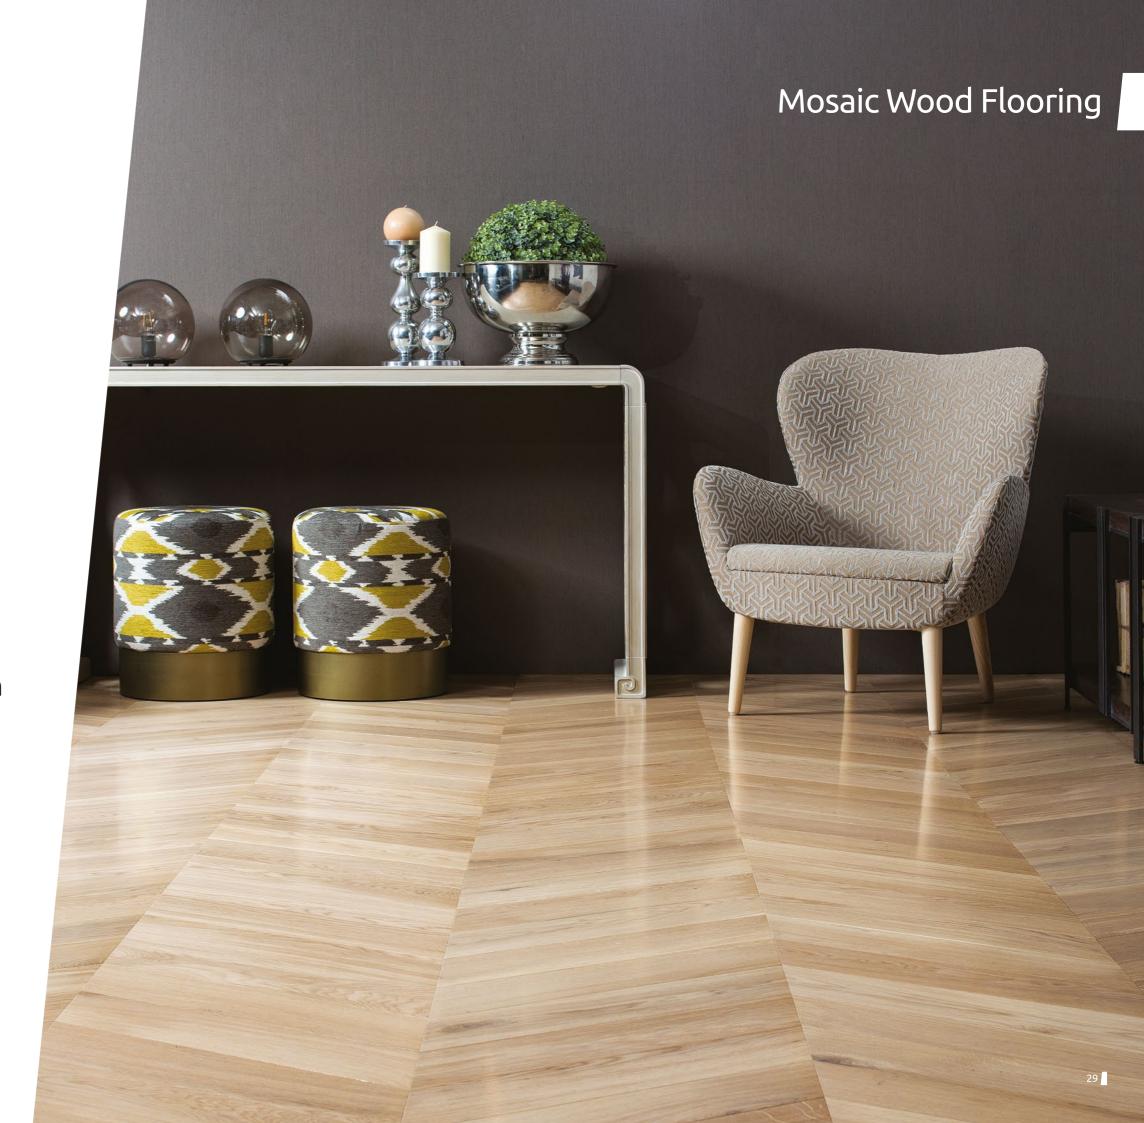





Lacquer

Silk Oil

Silk Oil ultra matte

GRADE:

S&B Select & Better

1C 1 Common

Tav Tavern


Trad Traditional


CONSTRUCTION:

Solid hardwood flooring



3-layer T&G engineered flooring



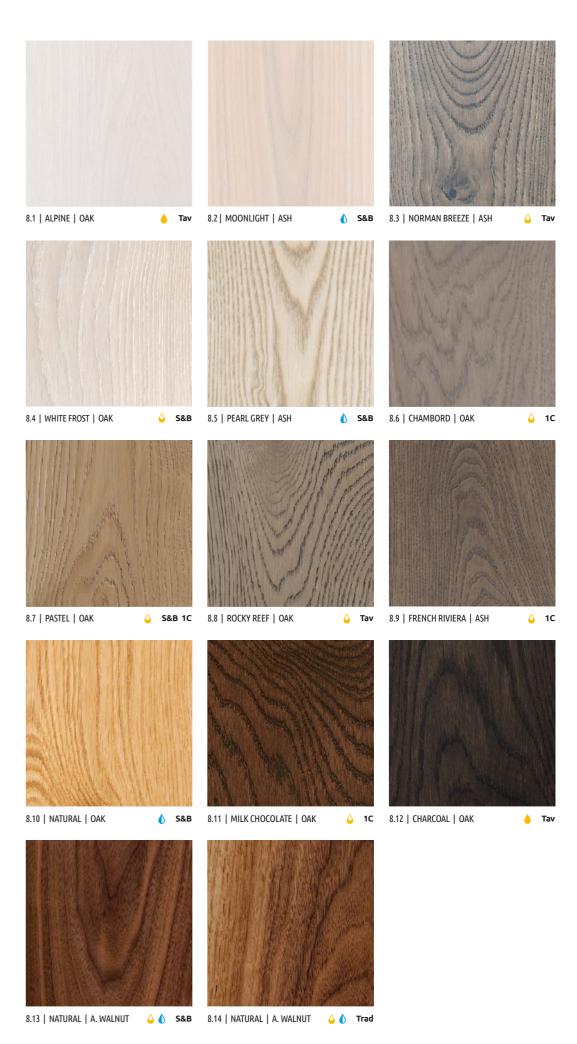





Lacquer

Silk Oil ultra matte

GRADE:

S&B Select & Better


1C 1 Common


Tav Tavern

Trad Traditional

CONSTRUCTION:

3-layer single strip flooring CosLoc 5G





♦ 1C 9.5 | NATURAL | A. WALNUT

9.4 | MILK CHOCOLATE | OAK

♦ S&B 9.3 | PASTEL | OAK





-) Lacqu
- Silk Oil
- Silk Oil ultra matte

GRADE:

S&B Select & Better

1C 1 Common

Tav Tavern

Trad Traditional


CONSTRUCTION:

Solid hardwood flooring

	82.55 mm
412.7 mm	

3-layer T&G engineered flooring

	107.95 m
647.7 mm	
	-
	127 mm
635 mm	-

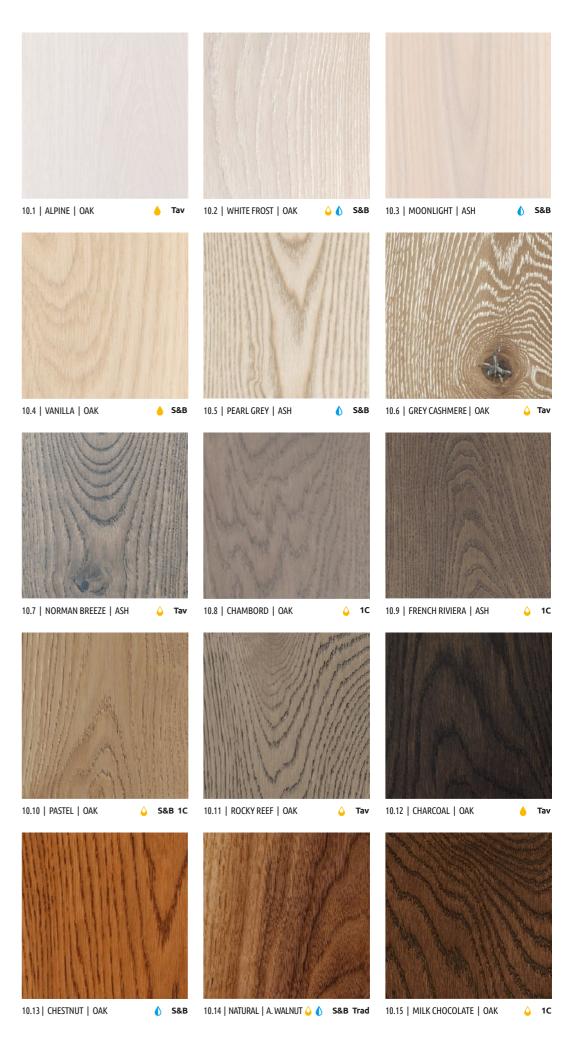





- Resilient Lacquer


GRADE:

- S&B Select & Better
- 1N 1 Natur
- Trad Traditional


CONSTRUCTION:


2-layer T&G engineered flooring






TRIANON



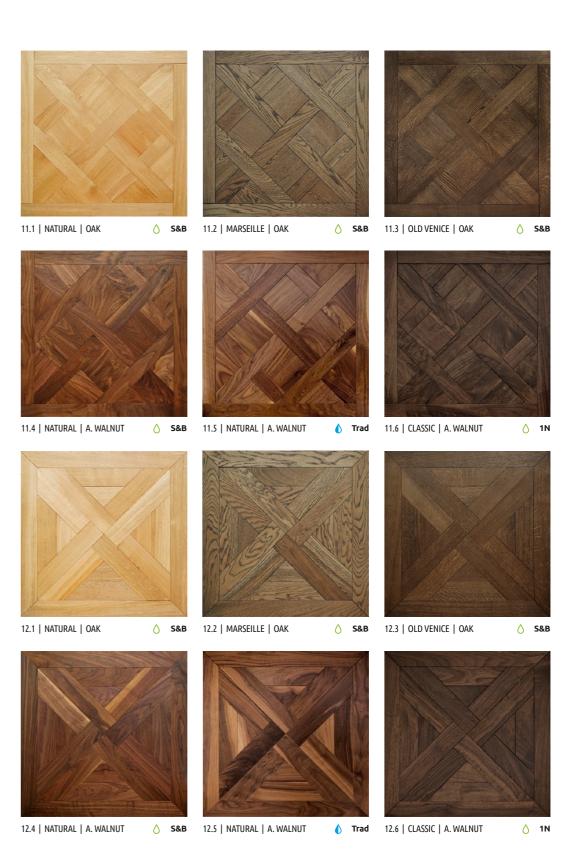



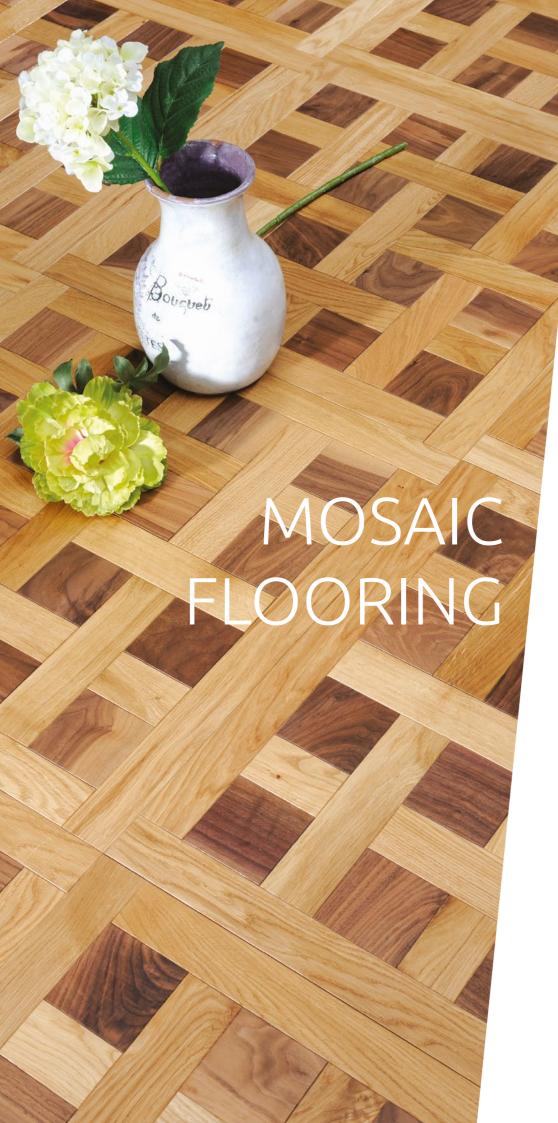

♠ Resilient Lacquer

GRADE:

S&B Select & Better


1N 1 Natur

Trad Traditional


CONSTRUCTION:

2-layer T&G engineered flooring

LANGEAIS



CHEVERNY







♦ S&B 13.2 | NATURAL | OAK &A. WALNUT ♦ S&B 13.3 | OLD VENICE | OAK





13.4 | NATURAL | A. WALNUT



♦ S&B 13.5 | NATURAL | A. WALNUT ♦ Trad 13.6 | CLASSIC | A. WALNUT









14.1 | NATURAL | OAK

14.4 | NATURAL | A. WALNUT



♦ S&B 14.2 | NATURAL | OAK & A. WALNUT ♦ S&B 14.3 | OLD VENICE | OAK







♦ S&B 14.5 | NATURAL | A. WALNUT ♦ Trad 14.6 | CLASSIC | A. WALNUT







Lacquer

GRADE:

S&B Select & Better

Tav Tavern

Trad Traditional

CONSTRUCTION:

3-layer engineered flooring

PYRAMID

Solid hardwood flooring





PARQUETRY:

15.1 | WHITE FROST | OAK






♦ S&B 15.2 | GREY CASHMERE | OAK







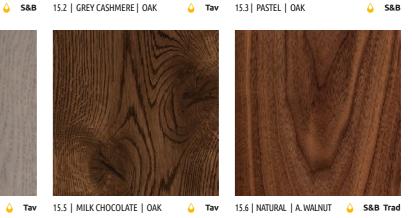

UNIBLOCK:

15.4 | CHAMBORD | OAK









16.4 | MILK CHOCOLATE | OAK





Tournament Pro Sport

Tournament Sport

Matrix Sport


Fitness Board

Portable Mosaic Dance









Indoor sports courts used for training and competitions of all types, including international tournaments and team sports such as basketball, volleyball, handball, squash etc.

All types of gyms and interiors used for fitness and physical activity, including training in team sports.

Fitness centers, yoga and aerobics studios, dance halls and choreographic studios.

Temporary floor covering solutions for holding sport dance competitions, exhibits, presentations and other public events.

Coswick sports flooring is designed in full compliance with the norms and standards of sports flooring manufacturing (European Standard EN14904, German DIN 18032-2, American ASTM F2772) and ensures safety, comfort and effectiveness during training and sports competitions of all types.





FEATURES OF COSWICK SPORTS FLOORING

3,5 | EN 14809

(A4 ≥2,3<5)

94 | EN 13036-4

(80-110)

91 | EN 12235

(≥90%)

0,21 | EN 1569

(≤0,5mm, min. 1500N)

Vertical deformation, mm

Friction.

nominal unit

Ball bounce, %

Rolling load, mm

TECHNICAL TOURNAMENT TOURNAMENT MATRIX FITNESS PORTABLE CHARACTERISTIC PRO SPORT MOSAIC DANCE SPORT SPORT **BOARD** Area-Elastic Area-Elastic Area-Elastic Area-Elastic Area-Elastic Type of floor A4 (EN14904) A4 (EN14904) A4 (EN14904) A4 (EN14904) A3 (EN14904) Construction 71 53 43 28 30 height, mm Oak, Ash, Oak, Ash, Species Oak, Ash Oak, Ash Oak Hard Maple Hard Maple 57,15x300...1845 82,55x300...1845 107,95x300...1845 127x300...1845 57,15x300...1845 82,55x300...1845 Hardwood flooring 107,95x300...1845 570x570 dimensions, mm Hardwood flooring 19,05 19,05 16 12,7 19,05 thickness, mm Natural / Resilient Natural / Resilient Natural / Resilient Natural / Natural / Color / Finish Sport Lacquer Sport Lacquer Sport Lacquer Silk Oil Silk Oil 66| EN 14808 64| EN 14808 60| EN 14808 59| EN 14808 Shock absorption, % (A4 ≥55%<75%) (A4 ≥55%<75%) (A4 ≥55%<75%) (A4 ≥55%<75%)

2,8 | EN 14809

3,1 | EN 14809

Sports Flooring Construction Type

3,8 | EN 14809



Acoustic Wall Panels
Decorative Wall Panels








SHEEN:


Matte

CONSTRUCTION:

Veneered on MDF base T&G





















/3/Ø8 • 17.2 | Ø8



17.1 | 14/2/Ø10 | 14/2/Ø8



17.2 | 13/3/Ø10 | 13/3/Ø8



▲ 17.2 | Ø6

COSWICK ACOUSTIC 30/2





COSWICK ACOUSTIC 14/2




COSWICK ACOUSTIC 16/16













SHEEN:

Matte

CONSTRUCTION:

Veneered on MDF base T&G









Technologies

Finishing Systems

Color Palette

Grades

Technical Information

Floor Care Products

Moldings





Technologies

3-layer T&G Engineered Flooring



THICKNESS, mm	15	19,05	19,05	21	19,05
TOP LAMELLA THICKNESS, mm	4	4	4	6	4
WIDTH, mm	127	127	190	190	300
LENGTH, mm	6002100	6002100	6002100	6002100	2950
MICROBEVEL, mm	0,5	0,5	0,5	0,5	0,5
AVERAGE LENGTH, m	1,0	0,99	1,22	1,12	2,95
FOOTAGE PER BOX, m²	2,0	2,0	1,86	1,49	1,77

3-layer Single Strip Flooring CosLoc 5G



THICKNESS, mm	15	15
TOP LAMELLA THICKNESS, mm	4	4
WIDTH, mm	127	190
LENGTH, mm	6002100	2100
MICROBEVEL, mm	0,5	0,5
AVERAGE LENGTH, m	0,99	2,1
FOOTAGE PER BOX, m ²	2,0	2,4

Solid Hardwood Flooring



THICKNESS, mm	19,05	19,05
WIDTH, mm	82,55	82,55
LENGTH, mm	320	412,75
MICROBEVEL, mm	0,5	0,5
AVERAGE LENGTH, m	320	412,75
FOOTAGE PER BOX, m ²	1,16	1,5


FEATURES:

- 3 layer construction with cross-laid interconnected middle core flooring is much less shrinks and expands at humidity variation and has wider range of applications in compare to solid flooring;
- birch is used for middle core and base lamella. Base lamella has increased thickness of 3 mm. This helps due to better symmetry to enhance internal balance of hardwood planks and reduce twisting or warping;
- cork compensators are added every 15 cm to balance internal stress in case of moisture effect and as a result helps flooring to withstand to humidity fluctuations:
- top wear layer is 4 mm and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood lamellas have no internal checks that could cause face splits later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance;
- high-adhesion hot-melted polyurethane glues are used to bond lamellas and middle core together. Extra strong bonding ensures that no delamination

occurs even under extreme moisture conditions or flooding. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally

INSTALLATION:

Three-layer engineered tongue-groove flooring can be installed below, on or above ground. Can be installed on heated floors. The flooring can be glued down over concrete, plywood or wooden subfloor or nail down over wooden










FEATURES:

- 3 layer construction with cross-laid interconnected middle core flooring is much less shrinks and expands at humidity variation and has wider range of applications in compare to solid flooring;
- birch is used for middle core and base lamella. Base lamella has increased thickness of 3 mm. This helps due to better symmetry to enhance internal balance of hardwood planks and reduce twisting or warping;
- cork compensators are added every 15 cm to balance internal stress in case of moisture effect and as a result helps flooring to withstand to humidity fluctuations;
- top wear layer is 4 mm and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood lamellas have no internal checks that could cause face splits later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance;
- high-adhesion hot-melted polyurethane glues are used to bond lamellas and middle core together. Extra strong bonding ensures that no delamination occurs even under extreme moisture conditions or flooding. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally friendly:

- using birch for middle core with no gaps in between cross-laid bars significantly improve click performance and eliminate squeaking in floors;
- Valinge 5G click system make installation fast and easy.

INSTALLATION:

Three-layer single strip flooring can be installed below, on or above ground. It can be used for heated floors. Three-layer single strip CosLoc flooring can be installed by floating way on underlayment or by glueing down over concrete, plywood or wooden subfloor. Strips are locked from four sides by CosLoc. If necessary, the flooring can be installed in another room.



FEATURES:

- environmentally clean product, contains zero artificial components in its
- the wear layer is 7 mm thick, which allows to sand the surface up to 5-6 times;
- beautifully expresses the versatility and richness of natural wood texture;
- ensures excellent heat- and sound insulation;
- strengthens structural soundness of flooring surface.

Manufactured of solid hardwood, flooring planks are sensitive to humidity and as a result seasonal fluctuations in plank size are possible. After installation during dry winters small gaps may appear between the planks, but will close down during humid summer. In order to prevent the seasonal gaps, it is recommended to maintain relative indoor humidity levels at 45-55% throughout the year.

INSTALLATION:

Solid hardwood flooring can be installed on or above ground level, by glue down or staple down to wooden subfloor. For glue down installation of long and wide planks, it is necessary to use staples or nails for pulling and securing planks to the subfloor and one to another.











Coswick Lacquer





Coswick Silk Oil





Coswick Wax





CHARACTERISTICS	TYPE OF FLOORING FINISH								
	CosNanoTech+	CosNanoTech+ matte	Silk Oil	Silk Oil ultra matte	Hardwax Oil	Hardwax Oil Combi			
CLASS OF MATERIALS	UV-cured polyurethane acrylates	UV-cured polyurethane acrylates	UV-cured modified oil-acrylates	UV-cured modified oil-acrylates	Organic oils and waxes, oxidative	UV-cured modified oil-acrylates, Organic oils and waxes, oxidative			
SURFACE TYPE	Closed pores	Closed pores	Semi-closed pores, wire brushed	Semi-closed pores, wire brushed	Open pores, wire brushed	Semi-closed pores, wire brushed			
GLOSS LEVEL	Semigloss or matte	Matte	Silk matte	Ultra matte	Matte	Silk matte			
WEAR-RESISTANCE	Very high	Very high	High	High	Medium	High			
RESISTANCE TO CHEMICALS	Very high	Very high	Very high	High	High	Very high			
CARE AND MAINTENANCE	Regular care	Regular care	Regular care, restorative care, finish renewal						
REPAIRABILITY	Low	Low	Medium	High	High	High			
RANGE OF USE	Residential and commercial	Residential and commercial	Residential and commercial	Residential and commercial	Residential and commercial	Residential and commercial			
FINISH WARRANTY	25 years for residential, 35 years for residential (for commercial finish)	25 years	-	-	-	-			

Finishing Systems

Coswick Lacquer

FINISH TECHNOLOGY

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminium dioxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

FEATURES

Clarity. Finished surface is clear and transparent. All you see is wood in its natural beauty.

Smoothness. Finished surface is very smooth to touch.

Durability. Innovative CosNanoTech+ finish is 10 times more wear-resistant than traditional urethane finishes. Coswick CosNanoTech+ prefinished floors are covered by 25-year finish wear warranty.

ECOLOGY

Environmentally friendly. CosNanoTech+ prefinished hardwood floors have zero VOC emissions.

Antibacterial Shield. CosNanoTech+ finish serves as a shield that prevents bacteria and mildew from multiplying on floor surface.

CARE AND MAINTENANCE

Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.

Coswick Silk Oil

FINISH TECHNOLOGY

Innovative Silk Oil protective finish consists of 4 coats of deep penetrating UV oil. Silk Oil finished flooring feels warm and smooth under your feet, it does not show dents and scratches as much as other finishes do. Silk Oil floor is very easy to maintain and restore.

FEATURES

Smoothness. Silk Oil finished floors feel warm and silky smooth under your feet. Walking barefoot on oiled floors feels incredible!

Universal use: Coswick Silk Oil floors are recommended for residential as well as commercial use. Water repellent properties of Silk Oil finish make oiled flooring the perfect choice for lakeside cottages, bars and restaurants.

Silk Oil is very forgiving. Because the finish is matte, small scratches and dents will not be visible on the floor surface, but will blend in with the natural wood grain texture.

ECOLOGY

Environmentally friendly. Silk Oil prefinished hardwood floors have zero VOC emissions.

Antibacterial Shield. Silk Oil finish serves as a shield that prevents bacteria and mildew from multiplying on floor surface.

CARE AND MAINTENANCE

Easy restoration and repair. If cared for correctly, oiled flooring will never need to be fully sanded and refinished. Depending on the amount of traffic, your Coswick Silk Oil floors will need to be re-oiled every few years. Coswick recovery oil can be applied directly over the old finish.

Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.

Coswick Wax

FINISH TECHNOLOGY

Hardwax Oil is an innovative hardwood flooring finish that consists of 3 layers of wax oil produced from natural components. Among the main ingredients of Hardwax Oil are organic oil, wax, and other natural components.

In Hardwax Oil finish, oil easily penetrates into wood pores, deeply saturating the wood, strengthening and protecting it from ill effects of moisture, dirt etc. Waxes create a hard protective film on the wood surface. Aside from moisture defense, they protect the floor surface from wearing.

Hardwood floors with Hardwax Oil finish easily absord moisture and release it back into the air, thus helping to ensure a healthy atmosphere in the room.

FFATURE

Along with wire brushing technique, Hardwax Oil finish emphasizes natural texture and beauty of oak. Pores appear "open", visually preserving the depth of texture and relief.

ECOLOGY

Environmentally friendly. Silk Oil prefinished hardwood floors have zero VOC emissions

CARE AND MAINTENANCE

Repairability. Hardwax Oil finish has a soft matte sheen, much like that of natural wood. Following finish renewal or re-waxing of the entire floor or worn-out areas, the sheen level temporarily increases, but returns to normal within a few days.



Grades

Select & Better (S&B)



Select and Better is the highest grade of hardwood. It has uniform grain texture, mild color variations are produced by differences in natural heartwood and sapwood. The face may contain unlimited sound sapwood and occasional small burls. Light brown streaks may not extend over the entire length of a piece. Occasional non-contrasting restored knots (10mm or smaller) are admitted on planks stained in dark colors as long as they do not stand out against the floor surface.

1 Common (1C)



The face of a plank may contain unlimited sound sapwood. Color variation is prominent. Small burls, light brown streaks, restored knots up to 25 mm, properly filled open checks and worm holes, slight imperfections in face work (torn grain) and burns are admitted. When stained in a dark color, surface appears uniform in shade and texture, making knots etc barely discernible.

1 Common is a tasteful floor where prominent variation is expected.

Tavern (Tav)



The face of a plank may contain prominent color variation, unlimited burls, brown streaks, tight knots and properly filled open knots, as well as worm holes. Imperfections in the face work (torn grain) and burns are admitted. Knots and other imperfections are intentionally highlighted in order to bring attention to the natural beauty and uniqueness of oak grain beauty.

1 Natur (1N)



The face of a plank may contain unlimited sound sapwood. Color variation is prominent. Small burls, light brown streaks, restored knots up to 25 mm, properly filled open checks and worm holes, slight imperfections in face work (torn grain) and burns are admitted. When stained in a dark color, surface appears uniform in shade and texture, making knots etc barely discernible. 1 Natur grade is used to classify wide plank flooring 190 mm.

Character (Char)



The face of a plank may contain prominent color variation, unlimited burls, brown streaks, open or filled knots of any size, and worm holes. Open splits and knots create effect of antique wood and emphasize authentic oak texture. Character grade is used to classify wide plank flooring 190mm; due to larger surface area, face of plank may contain a wide range and number of burls, streaks, knots, worm holes etc.

Technical Information

S&B Select & Better

1C 1 Common

Tav Tavern

Char Character

1N 1 Natur

Trad Traditional

CLASSIC COLLECTION

501.05	ENUCLI	CDARE	:	3-layer T&G engineered floori	ng	3-layer single strip	flooring CosLoc 5G
COLOR	FINISH	GRADE -	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 × 190 × 6002100 mm Footage per pack 1.86 m²	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	15/4 × 190 × 6002100 mm Footage per pack 2.3 m²
NATURAL	♠ Lacquer	S&B	1167-1101	1154-1101		1153-1101	
ROSE	♠ Lacquer	S&B	1167-1102	1154-1102		1153-1102	
CHESTNUT	♠ Lacquer	S&B	1167-1104	1154-1104		1153-1104	
WALNUT	♠ Lacquer	S&B	1167-1106	1154-1106		1153-1106	
CHARCOAL	♠ Lacquer	S&B	1167-1107	1154-1107		1153-1107	
VANILLA	♠ Lacquer	S&B	1167-1108	1154-1108		1153-1108	
MOONLIGHT	♠ Lacquer	S&B	1267-1136	1254-1136		1253-1136	
MOONLIGHT	△ Silk Oil	S&B	1267-1236	1254-1236		1253-1236	
LAVENDER	△ Silk Oil	S&B	1267-1580	1254-1580		1253-1580	
CARAMEL	△ Silk Oil	S&B	1267-1260	1254-1260		1253-1260	
NATURAL	♠ Lacquer	S&B	1367-1101	1354-1101	1363-1101	1353-1101	1361-1101
NATURAL	△ Silk Oil	S&B	1367-1201	1354-1201	1363-1201	1353-1201	1361-1201
NATURAL	♠ Lacquer	Trad	1367-3101	1354-3101	1363-3101	1353-3101	1361-3101
NATURAL	△ Silk Oil	Trad	1367-3201	1354-3201	1363-3201	1353-3201	1361-3201
CLASSIC	♠ Lacquer	1N	1367-3161	1354-3161	1363-3161	1353-3161	1361-3161
CLASSIC	△ Silk Oil	1N	1367-3261	1354-3261	1363-3261	1353-3261	1361-3261

BRUSHED & OILED COLLECTION

				3-layer T&G eng	ineered flooring	3-layer single strip flooring CosLoc 5G
	COLOR	FINISH	GRADE	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 × 127 × 6002100 mm Footage per pack 2.0 m²	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²
	NATURAL	△ Silk Oil	S&B	1167-1201	1154-1201	1153-1201
¥	CHESTNUT	△ Silk Oil	S&B	1167-1204	1154-1204	1153-1204
	CINNAMON	Silk Oil ultra matte	S&B	1167-1565	1154-1565	1153-1565
OA	VANILLA	Silk Oil ultra matte	S&B	1167-1508	1154-1508	1153-1508
	WHITE FROST	△ Silk Oil	S&B	1167-1258	1154-1258	1153-1258
	CHABAUD	△ Silk Oil	S&B	1167-1259	1154-1259	1153-1259
	GREY CLOUD	Silk Oil ultra matte	Tav	1267-4584	1254-4584	1253-4584
	CANADIAN CEDAR	Silk Oil ultra matte	1C	1267-3562	1254-3562	1253-3562
S.	FRENCH RIVIERA	△ Silk Oil	1C	1267-3257	1254-3257	1253-3257
AS	CLOUDY	△ Silk Oil	1C	1267-3235	1254-3235	1253-3235
	MOCCA	△ Silk Oil	1C	1267-3243	1254-3243	1253-3243
	NORMAN BREEZE		Tav	1267-4232	1254-4232	1253-4232

COUNTRY COLLECTION

COLOR	FINICI	EINIGH CDADE	3-layer T&G engineered flooring			3-layer single strip flooring CosLoc 5G		
	FINISH	GRADE	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 x 190 x 6002100 mm Footage per pack 1.86 m²	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	15/4 × 190 × 2100 mm Footage per pack 2.4 m²	
NATURAL	△ Silk Oil	1C/1N*	1167-3201	1154-3201	1163-3201*	1153-3201	1133-3201*	
CHESTNUT	△ Silk Oil	1C/1N*	1167-3204	1154-3204	1163-3204*	1153-3204	1133-3204*	
BROWN SUGAR	Silk Oil ultra matte	1C/1N*	1167-3529	1154-3529	1163-3529*	1153-3529	1133-3529*	
MILK CHOCOLATE	△ Silk Oil	1C/1N*	1167-3217	1154-3217	1163-3217*	1153-3217	1133-3217*	
CHAMBORD	△ Silk Oil	1C/1N*	1167-3215	1154-3215	1163-3215*	1153-3215	1133-3215*	
ALPINE	Silk Oil ultra matte	Tav/Char*	1167-4578	1154-4578	1163-7578*	1153-4578	1133-7578*	
SNOWDROP	Silk Oil ultra matte	Tav/Char*	1167-4593	1154-4593	1163-7593*	1153-4593	1133-7593*	
FRENCH ESTATE	△ Silk Oil	Tav/Char*	1167-4212	1154-4212	1163-7212*	1153-4212	1133-7212*	
DARK CHOCOLATE	△ Silk Oil	Tav/Char*	1167-4216	1154-4216	1163-7216*	1153-4216	1133-7216*	
ROCKY REEF	△ Silk Oil	Tav/Char*	1167-4230	1154-4230	1163-7230*	1153-4230	1133-7230*	
AMBER	△ Silk Oil	Tav/Char*	1167-4213	1154-4213	1163-7213*	1153-4213	1133-7213*	
GREY ASH	Silk Oil ultra matte	1N			1163-3503		1133-3503	



SIGNATURE COLLECTION

	COLOR	EINIICU	GRADE	3-layer T&G eng	gineered flooring	3-layer single strip flooring CosLoc 5G
	COLOR	FINISH	GRADE	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 × 127 × 6002100 mm Footage per pack 2.0 m²	15/4 × 127 × 6002100 mm Footage per pack 1.79 m²
	SANDY	▲ Lacquer matte	S&B		1154-1323	1153-1323
	STONEY CREEK	▲ Lacquer matte	S&B		1154-1325	1153-1325
ž	CHAMBORD	▲ Lacquer matte	S&B		1154-1315	1153-1315
OAK	ALBATROSS	▲ Lacquer matte	S&B		1154-1322	1153-1322
	NORD SEA	▲ Lacquer matte	S&B		1154-1324	1153-1324
	CHARCOAL	▲ Lacquer matte	S&B		1154-1307	1153-1307
	MOONLIGHT	▲ Lacquer matte	S&B	1267-1336	1254-1336	1253-1336
	SILVERY	▲ Lacquer matte	S&B	1267-1337	1254-1337	1253-1337
Ī	PEARL GREY	▲ Lacquer matte	S&B	1267-1345	1254-1345	1253-1345
ASH	TIGER EYE	▲ Lacquer matte	S&B	1267-1344	1254-1344	1253-1344
	ATLANTIC	▲ Lacquer matte	S&B	1267-1339	1254-1339	1253-1339
	CAPPUCCINO	▲ Lacquer matte	S&B	1267-1338	1254-1338	1253-1338

HERITAGE COLLECTION

COLOR			3-layer T&G engineered flooring			3-layer single strip flooring CosLoc 5G		
	FINISH	GRADE	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 × 127 × 6002100 mm Footage per pack 2.0 m²	19.05/4 × 190 × 6002100 mm Footage per pack 1.86 m²	15/4 × 127 × 6002100 mm Footage per pack 2.0 m²	15/4 × 190 × 2100 mm Footage per pack 2.4 m²	
PASTEL	△ Silk Oil	1C / 1N*		1154-3247	1163-3247*	1153-3247	1133-3247*	
ANTIQUE PATINA	△ Silk Oil	Tav/Char*	1167-4250	1154-4250	1163-7250*	1153-4250	1133-7250*	
GREY CASHMERE	△ Silk Oil	Tav/Char*	1167-4251	1154-4251	1163-7251*	1153-4251	1133-7251*	
FRENCH GOBELIN	△ Silk Oil	Tav/Char*	1167-4249	1154-4249	1163-7249*	1153-4249	1133-7249*	
TERRA	△ Silk Oil	Tav/Char*	1167-4248	1154-4248	1163-7248*	1153-4248	1133-7248*	
INDIGO	Silk Oil ultra matte	Tav/Char*	1167-4556	1154-4556	1163-7556*	1153-4556	1133-7556*	
GRAPE SEED	Silk Oil ultra matte	Tav/Char*	1167-4540	1154-4540	1163-7540*	1153-4540	1133-7540*	
VINTAGE BROWN	Silk Oil ultra matte			1154-4554	1163-7554*	1153-4554	1133-7554*	
RAUCHTOPAZ	Silk Oil ultra matte			1154-4505	1163-7505*	1153-4505	1133-7505*	
CRYSTAL WHITE	♦ Silk Oil ultra matte			1154-4588	1163-7588*	1153-4588	1133-7588*	
GREY VELVET	Silk Oil ultra matte			1154-4574	1163-7574*	1153-4574	1133-7574*	
IVORY	Silk Oil ultra matte			1154-4586	1163-7586*	1153-4586	1133-7586*	

ARTS & CRAFTS COLLECTION

•	AIN I D & CINA	AF13 COLLECTION			
	COLOR	FINISH	GRADE	3-layer T&G engineered flooring	3-layer single strip flooring CosLoc 5G
	COLOR	LINISH	GRADE	19.05/4 × 190 × 6002100 mm Footage per pack 1.86 m²	15/4 × 190 × 2100 mm Footage per pack 2.4 m²
	VIENNA	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	GENEVA	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	OLD VENICE	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	MARSEILLE	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	LONDON	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
OAK	BATISTE	Oil Silk Oil ultra matte	Char		
0	ALBION	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	STONEHENGE	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	HEATHER	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	MISTY FJORDS	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	BARCELONA	↑ Hardwax / ♦ Silk Oil ultra matte	Char		
	SCANDINAVIAN	↑ Hardwax / ♦ Silk Oil ultra matte	Char		

Technical Information

S&B Select & Better1C 1 CommonTavern

Char Character

1N 1 Natur

Trad Traditional

WIDE PLANK FLORING

	COLOR	FINICIA	IISH GRADE	3-layer T&G engineered flooring			
	COLOR	FINISH		19.05/4 × 300 × 2950 mm Footage per pack 1.77 m²	19.05/4 × 300 × 6002950 mm Footage per pack 1.77 m²		
	NATURAL		Char	1165-7501			
	NATURAL	Oil Hardwax	Char	1165-7901			
	VANILLA	△ Silk Oil	Char	1165-7508			
OAK	SNOWDROP	△ Silk Oil	Char	1165-7593			
ò	MILK CHOCOLATE		Char	1165-7517			
	BATISTE	Oil Hardwax	Char	1165-7918			
	MARSEILLE	↑ Hardwax Oil	Char	1165-7928			
	OLD VENICE	↑ Hardwax Oil	Char	1165-7921			
A.W.	NATURAL	Resilient Lacquer	Char		1366-7601		

CHEVRON COLLECTION

				Solid plank flooring		3-layer T&G eng	ineered flooring	
	COLOR	FINISH	GRADE	19.05 × 82.55 × 320 mm (45°) Footage per pack 1.16 m²	15/4 × 107.95 × 530 mm (45°) Footage per pack 1.72 m²	19.05/4 × 127 × 500 mm (45°) Footage per pack 1.016 m²	19.05/4 × 127 × 548 mm (60°) Footage per pack 1.114 m²	19.05/4 × 190 × 438.78 mm (60°) Footage per pack 1.667 m²
	NATURAL	♠ Lacquer	S&B	1128-1101	1169-1101			
	PASTEL	△ Silk Oil	S&B/1C*	1128-1247	1169-1247	1134-3247*	1123-3247*	1183-3247
	WHITE FROST	△ Silk Oil	S&B			1134-1258	1123-1258	
OAK	ALPINE	Silk Oil ultra matt	e Tav			1134-4578	1123-4578	
Š	CHAMBORD	△ Silk Oil	1C	1128-3215	1169-3215			1183-3215
	ROCKY REEF		Tav	1128-4230	1169-4230			1183-4230
	MILK CHOCOLATE	△ Silk Oil	1C	1128-3217	1169-3217	1134-3217	1123-3217	1183-3217
	CHARCOAL	Silk Oil ultra matt	e Tav	1128-4507	1169-4507			1183-4507
	PEARL GREY	♠ Lacquer	S&B		1269-1145			
ASH	MOONLIGHT	♠ Lacquer	S&B		1269-1136			
2	FRENCH RIVIERA		1C		1269-3257			
	NORMAN BREEZE		Tav		1269-4232			
L L	NATURAL	♦ Lacquer	S&B		1369-1101	1334-1101	1323-1101	1383-1101
AMERICAN WALNUI	NATURAL	△ Silk Oil	S&B		1369-1201	1334-1201	1323-1201	1383-1201
RICAL	NATURAL	♠ Lacquer	Trad		1369-3101	1334-3101	1323-3101	1383-3101
AME	NATURAL	△ Silk Oil	Trad		1369-3201	1334-3201	1323-3201	1383-3201

CHEVRON CosLoc COLLECTION

	COLOR	EINIGH	GRADE	3-layer T&G engineered flooring			
	COLOR	FINISH GRA		15/4 × 127 × 400 mm (60°) Footage per pack 1.016 m²	15/4 × 127 × 548 mm (60°) Footage per pack 1.392 m²		
	PASTEL	△ Silk Oil	1C	1127-3247	1126-3247		
¥	WHITE FROST	△ Silk Oil	S&B	1127-1258	1126-1258		
OAK	ALPINE	Silk Oil ultra matte	Tav	1127-4578	1126-4578		
	MILK CHOCOLATE	△ Silk Oil	1C	1127-3217	1126-3217		
NUT	NATURAL	♠ Lacquer	S&B	1327-1101	1326-1101		
AMERICAN WALNUT	NATURAL	△ Silk Oil	S&B	1327-1201	1326-1201		
	NATURAL	♠ Lacquer	Trad	1327-3101	1326-3101		
AME	NATURAL		Trad	1327-3201	1326-3201		



HERRINGBONE COLLECTION

	COLOR FINISH		EINIGH CDADE		Solid plank flooring	3-layer T&G	engineered flooring
	COLOR	FINIS	FINISH GRADE		19.05 × 82.55 × 412.75 mm (90°) Footage per pack 1.5 m²	15/4 × 107.95 × 647.7 mm (90°) Footage per pack 2.1 m²	19.05/4 × 127 × 635 mm (90°) Footage per pack 1.29 m²
	VANILLA	Silk O ultra r		S&B	1125-1508	1168-1508	1122-1508
	CHESTNUT	♠ Lacqu	ier	S&B	1125-1104	1168-1104	
	WHITE FROST	♠ Lacqu	ier	S&B	1125-1158	1168-1158	
	WHITE FROST	△ Silk O	il	S&B	1125-1258	1168-1258	1122-1258
OAK	PASTEL	△ Silk O	il S8	&B/1C*	1125-1247	1168-1247	1122-3247*
	ALPINE	Silk O ultra r		Tav			1122-4578
	CHAMBORD	💪 Silk Oi	il	1C	1125-3215	1168-3215	
	GREY CASHMERE	💪 Silk Oi	il	Tav	1125-4251	1168-4251	
	ROCKY REEF	💪 Silk Oi	il	Tav	1125-4230	1168-4230	
	MILK CHOCOLATE	💪 Silk Oi	il	1C			1122-3217
	CHARCOAL	Silk O ultra r	il matte	Tav	1125-4507	1168-4507	
	PEARL GREY	♠ Lacqu	ier	S&B		1268-1145	
ASH	MOONLIGHT	♠ Lacqu	ier	S&B		1268-1136	
ă	FRENCH RIVIERA	△ Silk O	il	1C		1268-3257	
	NORMAN BREEZE	△ Silk O	il	Tav		1268-4232	
Į.	NATURAL	♠ Lacqu	Jer :	S&B		1368-1101	1322-1101
AMERICAN WALNUT	NATURAL	△ Silk O	il	S&B		1368-1201	1322-1201
RICAN	NATURAL	♠ Lacqu	Jer	Trad		1368-3101	1322-3101
AME	NATURAL	△ Silk O	il	Trad		1368-3201	1322-3201

MOSAIC FLOORING

				2-layer T&G engineered flooring				
	COLOR	FINISH	GRADE	Pattern: Versailles 19.05/8 × 635 × 635 mm Footage per pack 1.61 m²	Pattern: Trianon 19.05/8 × 635 × 635 mm Footage per pack 1.61 m²	Pattern: Langeais 19.05/8 × 635 × 635 mm Footage per pack 1.61 m²	Pattern: Cheverny 19.05/8 × 635 × 635 mm Footage per pack 1.61 m²	
	NATURAL	Oil combi	S&B	1114-1701	1115-1701	1116-1701	1117-1701	
OAK	OLD VENICE	Oil combi	S&B	1114-1721	1115-1721	1116-1721	1117-1721	
	MARSEILLE	Oil combi	S&B	1114-1728	1115-1728			
₽	NATURAL	Oil combi	S&B	1314-1701	1315-1701	1316-1701	1317-1701	
WALNUT	NATURAL	Resilient Lacquer	Trad	1314-3601	1315-3601	1316-3601	1317-3601	
Ą	CLASSIC	Oil combi	1N	1314-3761	1315-3761	1316-3761	1317-3761	
A. W./OAK	NATURAL	Oil combi	S&B			1816-1701	1817-1701	

PARQUETRY

	501.05	FINISH	SDADE	3-layer T&G engineered flooring, TILE	3-layer G&G engineered flooring, PYRAMID
	COLOR	FINISH	GRADE	19.05/4x190x220 mm Footage per pack 1.257 m²	19.05/4x190x440 mm Footage per pack 1.257 m²
	WHITE FROST		S&B	1193-1258	1194-1258
	PASTEL		S&B	1193-1247	1194-1247
OAK	CHAMBORD	△ Silk Oil	Tav	1193-4215	1194-4215
	MILK CHOCOLATE	△ Silk Oil	Tav	1193-4217	1194-4217
	GREY CASHMERE		Tav	1193-4251	1194-4251
WALNUT	NATURAL	△ Silk Oil	S&B	1193-1201	1194-1201
A. WA	NATURAL	△ Silk Oil	Trad	1193-3201	1194-3201

63

Technical Information

DECORATIVE WALL PANELS


	501.00	CUEEN	Veneered on MDF base T&G				
	COLOR	SHEEN	16 x 600 x 600 mm	16 x 600 x 1200 mm			
	NATURAL	≜ Matte	5015-0512-0201	5015-0509-0201			
	CHESTNUT	≜ Matte	5015-0512-0204	5015-0509-0204			
OAK	STONEY CREEK	≜ Matte	5015-0512-0225	5015-0509-0225			
Ó	VANILLA	≜ Matte	5015-0512-0208	5015-0509-0208			
	CHAMBORD	≜ Matte	5015-0512-0215	5015-0509-0215			
	PASTEL	≜ Matte	5015-0512-0247	5015-0509-0247			
	MOONLIGHT	≜ Matte	5025-0512-0236	5025-0509-0236			
ASH	PEARL GREY	≜ Matte	5025-0512-0245	5025-0509-0245			
Ä	TIGER EYE	≜ Matte	5025-0512-0244	5025-0509-0244			
	MOCCA	≜ Matte	5025-0512-0243	5025-0509-0243			
A. WALNUT	NATURAL	≜ Matte	5035-0512-0201	5035-0509-0201			
A. WA	CLASSIC	≜ Matte	5035-0512-0261	5035-0509-0261			

ACOUSTIC WALL PANELS

	COLOR	SHEEN	DIMENSIONS, mm	Veneered on MDF base				
_	COLOR	SHEEN	DIMENSIONS, IIIII	30/2/Ø10	29/3/Ø10	14/2/Ø10	13/3/Ø10	
	NATURAL	▲ Matte	16x192x2400	5014-0304-0202-01	5014-0304-0402-01	5014-0304-0602-01	5014-0304-0802-01	
		Matte	16x576x2400	5014-0404-0202-01	5014-0404-0402-01	5014-0404-0602-01	5014-0404-0802-01	
	CHESTNIIT	▲ Matto	16x192x2400	5014-0304-0202-04	5014-0304-0402-04	5014-0304-0602-04	5014-0304-0802-04	
OAK	CHESTNUT	Matte	16x576x2400	5014-0404-0202-04	5014-0404-0402-04	5014-0404-0602-04	5014-0404-0802-04	
0		A Makka	16x192x2400	5014-0304-0202-25	5014-0304-0402-25	5014-0304-0602-25	5014-0304-0802-25	
	STONEY CREEK	Matte	16x576x2400	5014-0404-0202-25	5014-0404-0402-25	5014-0404-0602-25	5014-0404-0802-25	
		A M-11-	16x192x2400	5014-0304-0202-08	5014-0304-0402-08	5014-0304-0602-08	5014-0304-0802-08	
	VANILLA	Matte	16x576x2400	5014-0404-0202-08	5014-0404-0402-08	5014-0404-0602-08	5014-0404-0802-08	
	CHANDODD	A 14-15-	16x192x2400	5014-0304-0202-15	5014-0304-0402-15	5014-0304-0602-15	5014-0304-0802-15	
	CHAMBORD	■ Matte	16x576x2400	5014-0404-0202-15	5014-0404-0402-15	5014-0404-0602-15	5014-0404-0802-15	
	DACTEL	A Malla	16x192x2400	5014-0304-0202-47	5014-0304-0402-47	5014-0304-0602-47	5014-0304-0802-47	
	PASTEL	Matte	16x576x2400	5014-0404-0202-47	5014-0404-0402-47	5014-0404-0602-47	5014-0404-0802-47	
_	NATURAL	A Malla	16x192x2400	5034-0304-0202-01	5034-0304-0402-01	5034-0304-0602-01	5034-0304-0802-01	
WALNUT	NATURAL	Matte	16x576x2400	5034-0404-0202-01	5034-0404-0402-01	5034-0404-0602-01	5034-0404-0802-01	
Ŋ.		A	16x192x2400	5034-0304-0202-61	5034-0304-0402-61	5034-0304-0602-61	5034-0304-0802-61	
	CLASSIC	Matte	16x576x2400	5034-0404-0202-61	5034-0404-0402-61	5034-0404-0602-61	5034-0404-0802-61	
	COLOR SHEEN DIMENSIONS, mm		DIMENSIONS		Veneered o	on MDF base		
			Q	16	Q	18		
	NATURAL	▲ Matte	16x600x600	5014-0512-0902-01		5014-051	2-1002-01	
		• Marte	16x600x1200	5014-0509-0902-01		5014-050	9-1002-01	
	CHECTAILIT	▲ Matte	16x600x600	5014-0512-0902-04		5014-0512-1002-04		
	CHESTNUT	Matte	16x600x1200	5014-0509-0902-04		5014-0509-1002-04		
	STONEY CREEK	A Malla	16x600x600	5014-0512-0902-25		5014-0512-1002-25		
OAK	STONEY CREEK	Matte	16x600x1200	5014-0509-0902-25		5014-0509-1002-25		
O		A M-11-	16x600x600	5014-0512-0902-08		5014-0512-1002-08		
	VANILLA	Matte	16x600x1200	5014-050	9-0902-08	5014-0509-1002-08		
	CHANDODD	A Malla	16x600x600	5014-051	2-0902-15	5014-051	2-1002-15	
	CHAMBORD	Matte	16x600x1200	5014-050	9-0902-15	5014-050	9-1002-15	
	DACTEL	A M-11-	16x600x600	5014-051	2-0902-47	5014-051	2-1002-47	
	PASTEL	Matte	16x600x1200	5014-0509-0902-47		5014-050	9-1002-47	
_	NATURAL	A Matter	16x600x600	5034-051	2-0902-01	5034-051	2-1002-01	
PUN	NATURAL	■ Matte	16x600x1200	5034-050	9-0902-01	5034-050	9-1002-01	
ž				5034-0509-0902-01 5034-0512-0902-61		5034-0512-1002-61		
A. WALNUT		▲ Matte	16x600x600	5034-051	2-0902-61	5034-051	2-1002-61	

Molding

AVAILABLE IN ALL COSWICK COLORS AND FINISHES

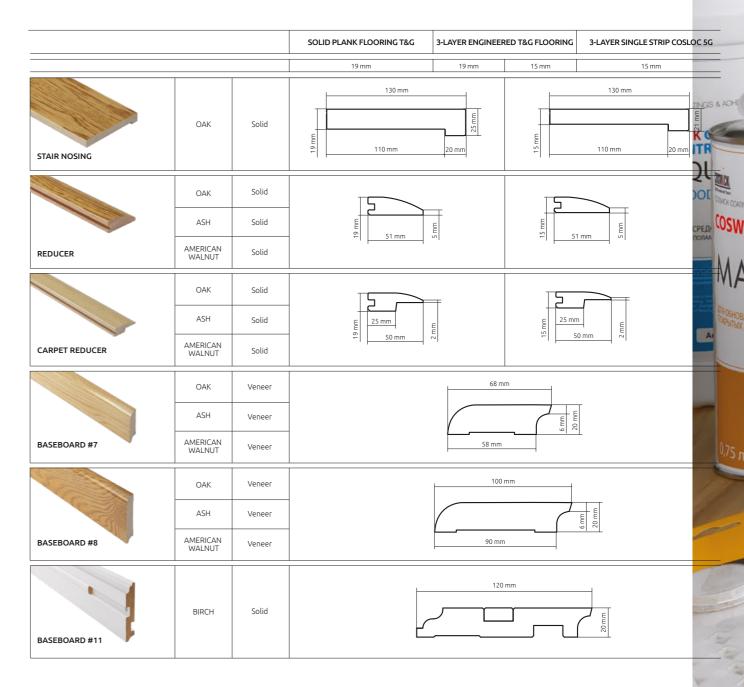



COSWICK -**OVER 25 YEARS** OF DEDICATION TO HARDWOOD FLOORING

Since 1995 Coswick has been creating premium quality hardwood floors of superb and long-lasting performance. The company gained wide manufacturing experience by operating a fully integrated production cycle from logs to readymade prefinished hardwood flooring and became recognized all over the world. We are glad to share our experience with experts and hardwood floors owners as a system of tested products for every stage of hardwood flooring use.

Coswick well-balanced formula and unique quality control system ensure highest quality of primers, adhesives, lacquers, cleaners, renovation and care products suitable for all types of hardwood floors and protectivedecorative finishes.

Coswick is dedicated to production of well balanced, high performance, eco-friendly and easy to use products. We are working to make your hardwood flooring everlasting and bringing you joy and happiness.

Floor Care Products




COSWICK SERVICE KIT

is designed to clean solid and engineered wood floors that have a lacquer or oil finish. The kit includes a microfiber mop cloth and ready-to-use Coswick Hardwood Cleaner.

- · Very effective against dust;
- · Highly absorbent and long lasting.
- Ready-to-use Hardwood Cleaner:
- Perfect for regular cleaning of finished wooden floors;
- Excellent grease and dirt removing properties;
- Non-abrasive, leaves no residue;

CLEANER FOR LACQUERED HARDWOOD FLOORS



CLEANER CONCENTRATE FOR LACQUERED HARDWOOD FLOORS

Cleaner Concentrate is meant for regular care and maintenance of lacquered or UV-oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. Dilute agent at ratio of 1:50 (10 ml of concentrate per 0.5 l of water).

CLEANER FOR OILED AND HARDWAX OILED HARDWOOD FLOORS

Cleaner is meant for regular care and maintenance of oiled and Hardwax oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. 0.5 litres per bottle.

CLEANER CONCENTRATE FOR OILED AND HARDWAX OILED HARDWOOD FLOORS

Cleaner Concentrate is meant for regular care and maintenance of oiled and Hardwax oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. Dilute agent at ratio of 1:50 (10 ml of concentrate per 0.5 l of water).

RENEWER OIL FOR OILED AND HARDWAX-OILED HARDWOOD FLOORS

Product is meant for surface renewal of hardwood floors with UV oil and Hardwax-oil finishes. Product creates a firm, elastic protective surface film. 0.75 litres per bottle.

PROTECTIVE WAX FOR HARDWOOD FLOORS

Product is intended for recovering of hardwood floors with natural oil, Hardwax or Silk Oil finishes. Product creates a thin, elastic, protective and water-repellent surface film. 0.75 litre per bottle.

TINTED OIL FOR RESTORATION OF OILED AND HARDWAX OILED

Product is meant for recovery and repair of hardwood floors with natural oil and Hardwax finishes. Product creates an elastic protective film on floor surface.

COSWICK WOOD STAIN

Coswick stains are designed for giving wood surfaces a desired color. 0.75 litre per bottle.

HEAVY DUTY CLEANER FOR HARDWOOD FLOORS

Coswick Heavy Duty Cleaner is meant for lacquered and oiled prefinished wood flooring Recommended for removal of glue spots just after installation and for removal of any deep stain spots and marks during regular floor maintenance. 1.0 litre per bottle.

REPAIR KIT PROFI



CLEANER

COSWICK WAX FILLER

Ready-to-use wax for quick repairs of small damages in floors with all types of finish. Wax filler is available in all Coswick colors.



















COSWICK LTD.

2B Kolasa Str 223 034 Zaslavl Republic of Belarus Tel. +375-17-543-2012 Fax: +375-17-543-2020 E-mail: sales@coswick.com

www.coswick.com

